

Please carefully read and save these instructions before attempting to assemble, maintain, install, or operate this product. Observe all safety information to protect yourself and others. Failure to observe the instructions may result in property damage and/or personal injury. Please keep instructions for future reference.

Important Operating Instructions



Cordless Screwdriver

Model: 6274

CALIFORNIA PROPOSITION 65

WARNING: You can create dust when you cut, sand, drill or grind materials such as wood, paint, metal, concrete, cement, or other masonry. This dust often contains chemicals known to cause cancer, birth defects, or other reproductive harm. Wear protective gear.

WARNING: This product or its power cord may contain chemicals, including lead, known to the State of California to cause cancer and birth defects or other reproductive harm. Wash hands after handling.

Specifications

Screwdriver:

Rechargeable battery voltage:
4.8V

Max. Speed: 150rpm

Max. Torque: 2.5Nm


Battery: Ni-CD

Battery capability : 600mAh

Forward/reverse switch

LED Light

To load a bit:

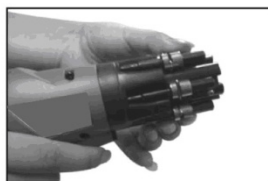

1. Rotate the magazine to find desired bit


2. Remove the bit by lifting up and out




3. Insert the bit into the chuck

To unload a bit:

1. Remove the drill bit from chuck
2. Rotate drill bit down into "lock" position

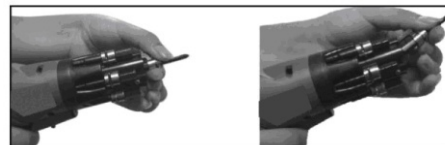

This unique cordless screwdriver is equipped with a "flip bit" quick-loader for maximum convenience.

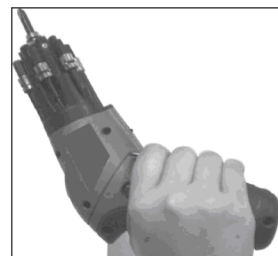

Charger:

Input: 120V -60Hz

Protection against electric shock: Class II

Protection against moisture: IP20

Output: 6V DC, 300mA

Charge time: about 3-5 hours

To charge the unit:

1. Connect the charger adaptor to a power outlet and insert the plug into the socket on the handle.
2. The red light on the battery display will light up once the adaptor is connected to a power source.
3. Once the battery is completely charged, the red light will turn off. If possible, remove the adaptor after the battery is fully charged.

For warranty purchases, please keep your dated proof of purchase. File or attach to the manual for safekeeping.

To replace a bit:

Pull the bit from its carrier and replace with a new one as indicated.



Push down and up on the tip of the bit, while pulling up on the base. Once the bit passes the holding spring, you can pull it out.

To order replacement bits:

Send a Request to
feedback@natitools.com
or
call 1-800-348-5004

To change position:




Press the lock switch, and turn clockwise 90 degree to rotate the handle.

Screwing/Unscrewing:

The screwdriver is equipped with a forward/reverse switch to change the rotation of the unit.

1. Clockwise - push button to left
2. Counterclockwise - push the button to the right
3. To stop rotation release the switch.

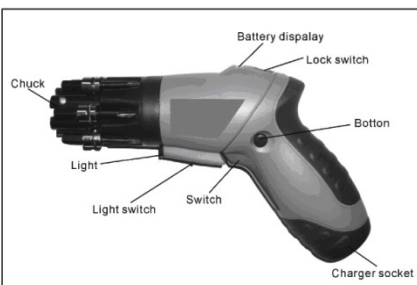

Safety instructions:

1. Wear protective equipment (gloves, shoes, eyewear, breathing filters, etc.) Do not wear loose fitting clothing or jewelry. Tie back long hair.
2. Disconnect from charging equipment when performing maintenance on or while operating the tool.
3. Use in a clean and well lit area
4. Store the tool away from heat and dangerous vapors. Do not operate close to explosive or flammable materials.
5. This is a do-it-yourself tool & should be used as such and not considered as heavy duty equipment.
6. Keep tools away from children
7. When drilling into metal sheets, use a vice to hold the metal to a block of wood.
8. Do not use the drill or screwdriver on an electrically live part. Locate electrical wires or cables in the wall before drilling into a wall.

9. Do not try to open or disassemble the tool or charger. Only a specialist should perform maintenance on the tool.

10. If the charger becomes damaged, replace it before using

11. This tool does not require special maintenance.

12. Disconnect the charger before cleaning the plastic parts. Use a wet cloth and mild soap. Do not immerse the tool in water. Do not use cleaning solvents to clean the tool.

13. After cleaning a bit, make sure that the used bit is securely in its storage position.

14. Do not use tool bits that cannot be inserted into the transfer arms.

Limited Warranty: North American Tool (NAT) Industries makes every effort to ensure that this product meets high quality and durability standards. NAT warrants to the original retail consumer a 1-year limited warranty from the date the product was purchased at retail and each product is free from defects in materials. Warranty does not apply to defects due directly or indirectly to misuse, abuse, negligence or accidents, repairs or alterations, or a lack of maintenance. NAT shall in no event be liable for death, injuries to persons or property, or for incidental, special or consequential damages arising from the use of our products. Shipping and handling charges may apply. If a defect is found, NAT will either repair or replace the product at its discretion.

Call 1-800-348-5004 for technical assistance

Please provide the following information:

- Model number
- Part description and number as shown in parts list
- Serial number (if any)

Address any correspondence to:

North American Tool Industries
84 Commercial Rd
Huntington, IN 46750